


**FLAG POLE NOTES**

- FP1. FLAG POLE SHALL BE 40-FOOT TALL COMMERCIAL OUTDOOR STEEL WITH INTERNAL LANYARD. OWNER TO SELECT TOPPER.
- FP2. FLAG POLE TO BE BOLTED TO CONCRETE FOUNDATION. INSTALL ANCHOR BOLTS PER MANUFACTURER'S RECOMMENDATIONS.
- FP3. FLAG POLE FOUNDATION TO BE 24-INCH DIAMETER BY 17-FOOT PIER REINFORCED WITH 6-#8 VERTICALS AND A #3 SPIRAL AT A 3-INCH SPACING. CONCRETE TO BE 4,000 PSI WITH MAX W/C=0.50. SUBMIT MIX DESIGN. REINFORCING STEEL SHALL CONFORM TO ASTM A615, GRADE 60. PROVIDE CLASS B SPLICE. SEE DETAIL 9 ON C5.1.
- FP4. POLE SHALL HAVE PERMANENT PROVISIONS FOR THE INSTALLATION OF LIGHT FIXTURES (BY OTHERS) 20- FEET FROM TOP OF POLE. PROVIDE TENON TYPE MOUNTS THAT ARE PERMANENTLY ATTACHED TO POLE WITH 2-3/8-INCH OUTSIDE DIAMETER (O.D.) STEEL TUBING FOR ATTACHMENT TO FIXTURES. AT POLE BASE, PROVIDE ELECTRICAL HANDHOLE AND COVER FOR INSTALLATION OF WIRING TO FIXTURES (BY OTHERS).

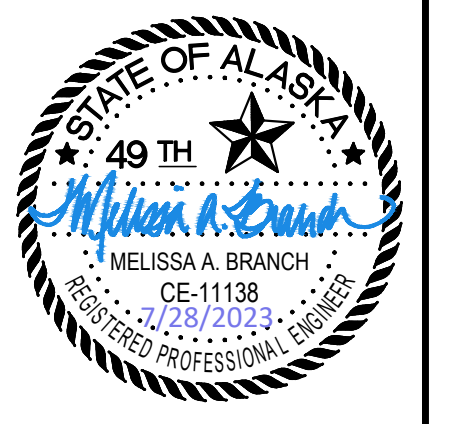

**BIG CITY ENGINEERS**  
 P.O. BOX 92946  
 ANCHORAGE, ALASKA 99509  
 907/360-0985  
 LICENSE # 102525

**AIDEA PARKING IMPROVEMENTS**  
 813 W. NORTHERN LIGHTS BLVD.  
 LOT 1A, BLOCK 3, SUNBEAM; LOT 3, WOODS; AND LOT 3, CG BURNETT SUBD.

REVISION	DATE	DESCRIPTION	BY
7/28/2023		UPDATES PER BID QUESTIONS	MAB

DATE	10.7.2022
PN	TBA
GRID	SW1529
SCALE	AS SHOWN
ENGINEER	MAB
DRAFTER	MAB

SHEET TITLE  
**SITE LAYOUT PLAN**  
 SHEET NUMBER  
**C3.0**  
 3 OF 8

**SITE LAYOUT PLAN**  
 SCALE: 1" = 20'

